


# Defining the State interfaces and classes

First let's create an interface for State, which all our states implement:

Here's the interface for all states. The methods map directly to actions that could happen to the Gumball Machine (these are the same methods as in the previous code).

Then take each state in our design and encapsulate it in a class that implements the State interface.

To figure out what states we need, we look at our previous code...

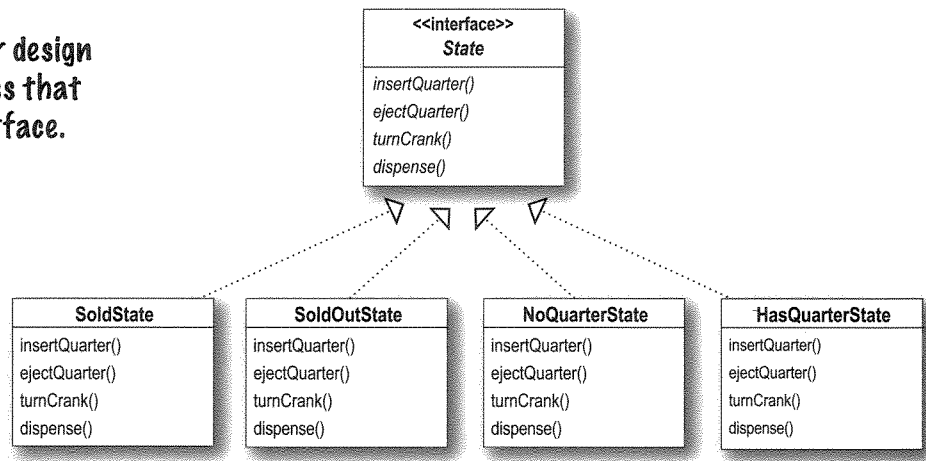

```

public class GumballMachine {

    final static int SOLD_OUT = 0;
    final static int NO_QUARTER = 1;
    final static int HAS_QUARTER = 2;
    final static int SOLD = 3;

    int state = SOLD_OUT;
    int count = 0;
}
    
```

... and we map each state directly to a class.

Don't forget, we need a new "winner" state too that implements the state interface. We'll come back to this after we reimplement the first version of the Gumball Machine.

